Make the following section a part of the Standard Specifications:

"SECTION 694 – PROJECT SIGN

694.01 Description. This work shall consist of furnishing, constructing, placing, maintaining and subsequently removing two project signs.

694.02 Materials. Sign panel backing shall be sheet aluminum, 0.100 inch minimum thickness conforming to ASTM B 209, alloy 6061-T6 flat sheet. Finishing shall be Type I (Engineering Grade) or Type II (Super Engineering Grade) retroreflective sheeting conforming to ASTM D4956. Sign posts shall be channel posts of uniform flanged channel section produced from high strength rail steel shall conform to ASTM A 499, grade 60 and shall be zinc coated in accordance with AASHTO M 111. Weight of each anchor base post and sign post, before holes are punched, shall be 4 pounds per foot.

694.03 Construction Requirements.

(A) General.

Construct, install, maintain and remove two project signs as detailed on the attached Project Sign Detail. Signs shall be supported with two (2) 4.00 lbs/ft. galvanized flanged channel posts and sign stiffeners as specified by Standard Plan sheet TE-02. Location of the project signs to be determined by the Engineer.

(B) Sign Specifications.

(1) Letter Style. For mixed-case legends (6 inches initial upper-case letter followed by 4-1/2 inches lower-case letters), letters shall be Series D. 6 inches upper-case letters shall be Series D. 4 inches upper-case letters shall be Series B. Design standards for letters and spacing shall be as provided in the "Standard Highway Signs and Markings" book (FHWA).

(2) Title. The route or facility name and specific major type of work of the project shall be included in the title. The Engineer will review and accept project signs' wording before fabrication.

694.04 Measurement. Project signs will be paid on a lump sum basis. Measurement for payment will not apply.

694.05 Payment. The Engineer will pay for the accepted project signs on a contract lump sum basis. Payment shall be full compensation for the work prescribed in this section and the contract documents.

The Engineer will pay for following pay item when included in the proposal schedule:

Pay Item	Pay Unit
Project signs	Lump Sum

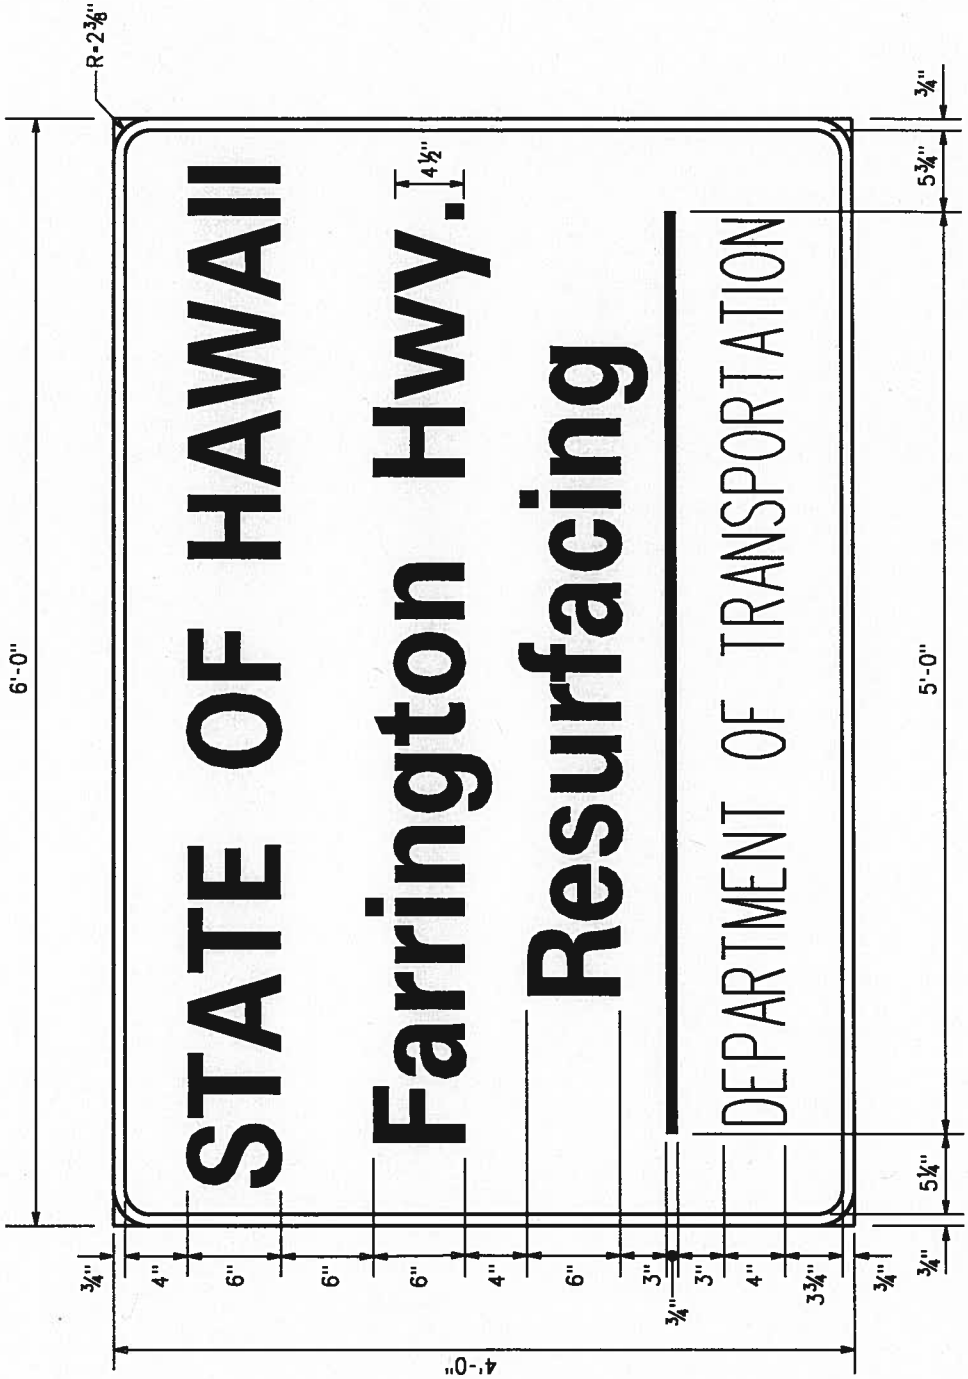

COLORS:
LEGEND - WHITE
BACKGROUND - GREEN

END OF SECTION 694"
694-3a